



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication: **07.11.2001 Bulletin 2001/45** (51) Int Cl.7: **B64C 31/028**

(21) Application number: **00830325.7**

(22) Date of filing: **05.05.2000**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
 Designated Extension States:
AL LT LV MK RO SI

(71) Applicant: **Petretto, Gesuino**
00141 Roma (IT)

(72) Inventor: **Petretto, Gesuino**
00141 Roma (IT)

(74) Representative: **Iannone, Carlo Luigi et al**
Ing. Barzanò & Zanardo Roma S.p.A.
Via Piemonte, 26
00187 Roma (IT)

(54) **Hang glider**

(57) A hang glider (1) comprises a bearing tubular structure made of a longitudinal crossbar (4), a lower control trapeze (2) an upper vertical turret (6) and two wing spars (8), and a variable dihedral angle wing (10),

which has its ends secured to the ends of the two spars and is secured to said lower control trapeze (2) through a plurality of cords (22a-28a,22b-28b) of which the lengths can be varied to lift or lower the wing, thereby varying the hang glider lift and speed during flight.

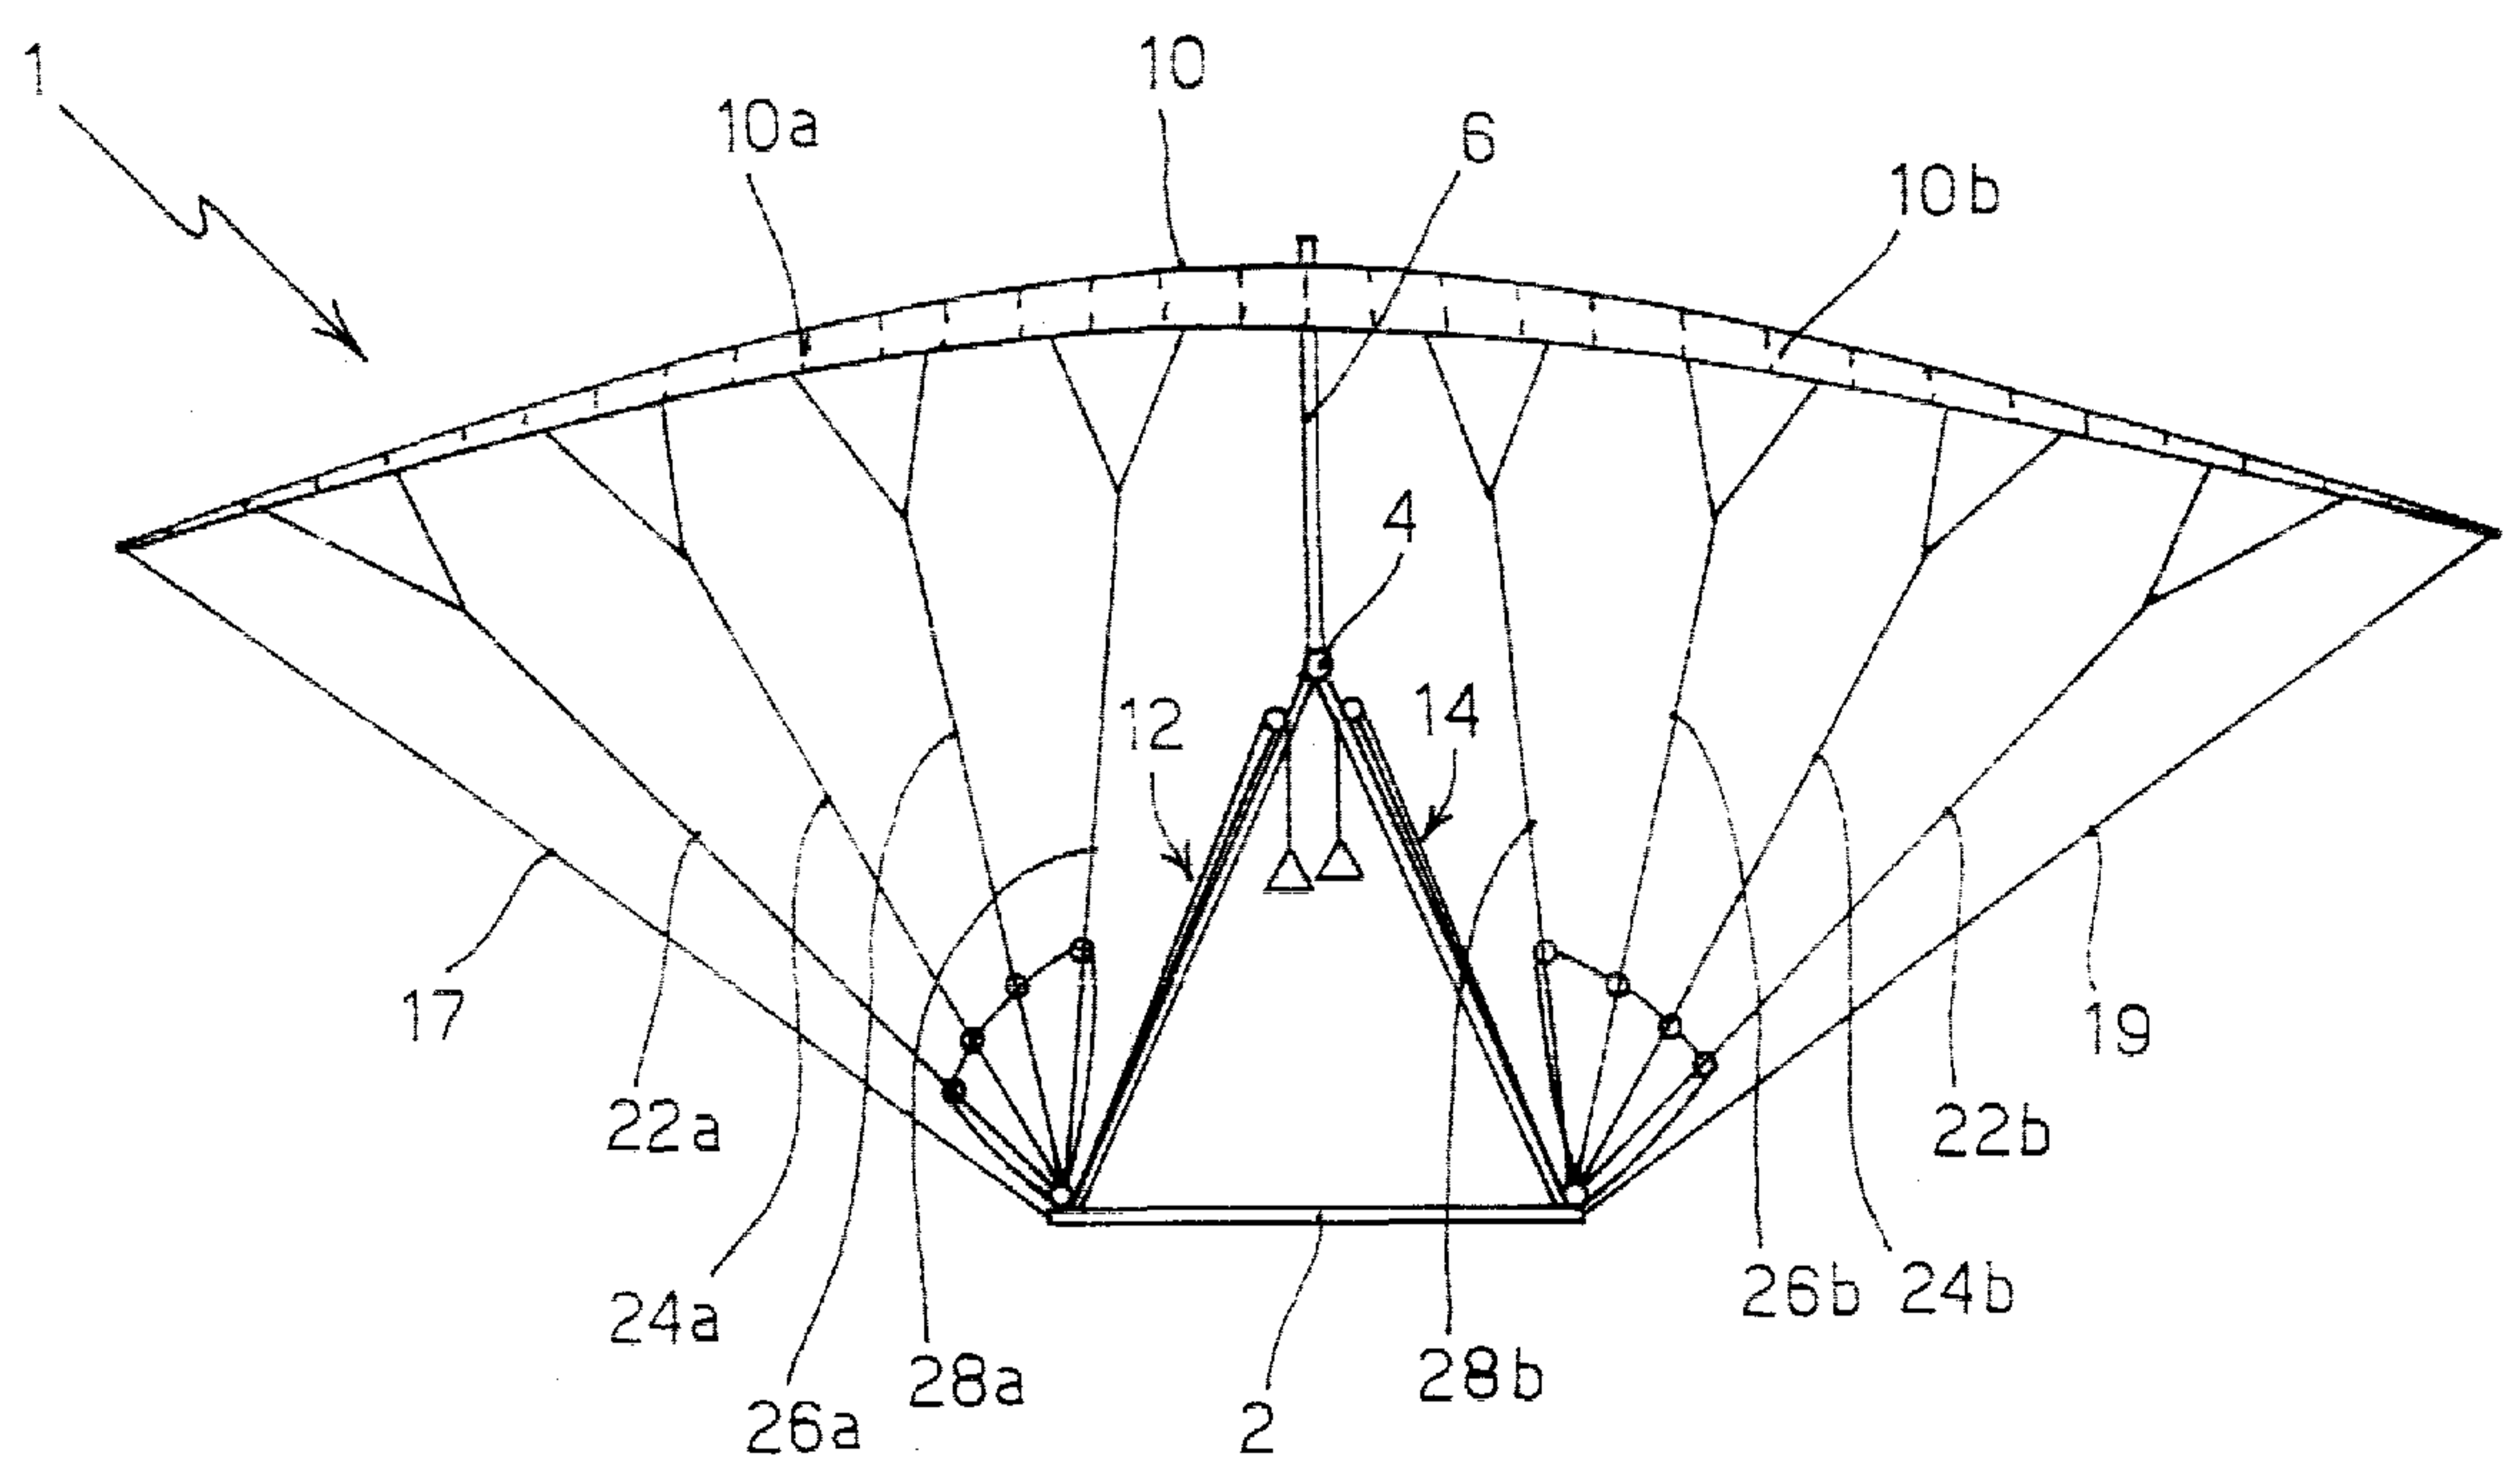


FIG. 1

EP 1 151 918 A1

Description

[0001] The present invention concerns a light hang glider.

[0002] More particularly, the invention relates to a light hang glider of a type that can be disassembled, the hang glider comprising a tubular frame and a wing made of cloth.

[0003] One of the main problems with ultra-light aircrafts is the difficulty of transporting them: actually, even if those aircrafts often can be disassembled, they are very cumbersome (up to 6 m long) also in folded conditions and, that is more, are very heavy. Their transportation requires therefore use of suitable luggage racks located on a vehicle roof, and loading and unloading operations, as well as assembling and disassembling operations are complex and time consuming.

[0004] To make the structure of those aircrafts lighter and simpler, special technical measures have been adopted, such as for instance use of lighter and lighter materials, such as aluminium alloys, for building the bearing structure, or of particular synthetic cloths for the wings.

[0005] However, since in conventional hang gliders the wing is wholly borne by the frame and it must bear considerable stresses during flight, it is impossible to reduce the weight of both the bearing frame and the wing below certain limits.

[0006] The aim of the invention is to provide a hang glider, which is easy to be assembled and disassembled and has a reduced weight and size and thus is easy to transport, while presenting however high performance, optimum manoeuvring capability and high safety.

[0007] This aim is achieved by a hang glider with a self-inflating wing with a box structure and of variable dihedral type, associated with a particularly light bearing tubular structure.

[0008] The above and other aims are attained by the light hang glider made in accordance to the invention, as claimed in the appended claims.

[0009] The light hang glider made in accordance with the invention can be readily disassembled and, owing to its reduced size and weight, transported even inside a small motor car. Moreover, thanks to the self-inflatable and hence self-bearing wing, it is possible to considerably reduce the weight and the size of the frame, while ensuring high structural strength and robustness.

[0010] The above and other aims of the invention will become more apparent from the description of a preferred embodiment, with reference to the accompanying drawings, in which:

- Fig. 1 is a front view of a hang glider made in accordance with the invention, with the wing in its uppermost position;
- Fig. 1 is a front view of a hang glider made in accordance with the invention, with the wing its lowermost position;

- Fig. 3 is an enlarged detail of the hang glider shown in Fig. 1;
- Fig. 4 is a top view of a hang glider made in accordance with the present invention;
- 5 - Fig. 5 is a cross-sectional view of the wing of a hang glider made in accordance with the present invention; and
- Fig. 6 is a perspective view of a valve for air inlet into a wing of a hang glider made in accordance with the present invention.

[0011] With reference to Figs. 1 and 2, a hang glider 1 made in accordance with the present invention comprises a bearing tubular structure including a longitudinal crossbar 4, a lower control trapeze 2, an upper vertical turret 6 and two wing spars (not visible in the Figure since they are located inside the wing), and a wing 10 made of two half-wings 10a, 10b, joined together in the central portion and secured at their ends to the ends of the two wing spars.

[0012] All members forming the bearing tubular structure can be disassembled; moreover the two wing spars may be of telescopic type, so that they can be readily and quickly shortened.

25 **[0013]** Two lower tie rods 17, 19 join the end of the wing spars with lower trapeze 2 to keep the correct angles and positions of the wing spars during flight.

[0014] Wing 10 is connected to the bearing structure, in particular to lower control trapeze 2, through a plurality of cords 22a - 28a, 22b - 28b of which the lengths can be varied to move the central portion of wing 10 close to or away from lower control trapeze 2. Thus, it is possible to vary the so-called wing dihedral, i. e. the angle between each half wing and the normal to the symmetry plane of the whole wing.

35 **[0015]** Fig. 1 indeed shows a hang glider in which wing 10 is in its uppermost position, which is characterised by a higher lift and hence is preferred during take-off and landing.

40 **[0016]** Cords 22a - 28a, 22b - 28b are arranged along the whole length of wing 10 and are suitably spaced from one another so as to uniformly distribute the load of the pilot and of the bearing structure itself over the wing. The number of cords shown in the drawing is merely given by way of an indication and can vary depending on the wing size and shape.

45 **[0017]** Each cord may be shortened, as described in detail hereinafter, by a variable extent that depends on the cord attack position on the wing and ranges from zero at the ends of half wings 10a, 10b to a maximum at the wing central portion.

[0018] In its central part wing 10 is provided with an eyelet 17 allowing the wing to slide on the upper vertical turret 6, without however leaving the turret itself.

55 **[0019]** Fig. 2 shows the same hang glider 1 in which wing 10 is in its lowermost position, which is characterised by a lower lift allowing the aircraft to reach higher speeds.

[0020] In order to lower wing 10 and bring it to the lowermost position shown in Fig. 2 or to any intermediate position between the uppermost and lowermost positions, a rope pulley system 12, 14 is used, which is controlled by the pilot and is connected to cords 22a - 28a, 22b - 28b.

[0021] Fig. 3 shows in detail half the rope pulley system, namely the half system associated with the left half wing 10a, since the structure and operation of the other half system are the same.

[0022] The pulley system comprises a rope 30, passing inside a set of rings 23a, 25a, 27a and 29a secured to wing cords 22a, 24a, 26a and 28a, respectively. A first end of rope 30 is secured to trapeze 2 near a first pulley 32, whereas the other end is provided with a handle 36 that can be operated by the pilot. When the pilot pulls the handle downwards, thanks to the first and second pulleys 32, 34 the cords are pulled downwards in uniform manner, since rope 30 can freely slide inside rings 23a, 25a, 27a and 29a. Moreover, the pulley system allows scaling down the required effort, thus making the manoeuvre particularly easy.

[0023] Notwithstanding the provision of rope 30, for safety reasons the cords are anyway secured to trapeze 2. In this manner, even in case of breakage of rope 30, the wing remains connected to the bearing structure.

[0024] Fig. 4 is a top view of hang glider 1. To better highlight the bearing structure, in particular a telescopic wing spar 8, righthand half wing 10a has been removed and it is indicated in phantom lines. On the contrary partition walls 50 between the boxes and valves 44 for air inlet into the boxes are shown in lefthand half wing 10b. Each box is equipped with an air inlet valve 44, yet for sake of simplicity Fig. 4 shows only a limited number of valves.

[0025] Moreover Fig. 4 shows two leading tie-rods 40, 42 used to keep the correct angles of the wing spars relative to the aircraft symmetry axis.

[0026] The end portions of the half wings, shown at 46a and 46b, are thinner and they are connected, through suitable cords not shown in the Figure, to corresponding control members that can be operated by the pilot in order to make some manoeuvres, such as turns, easier.

[0027] Fig. 5 shows instead wing 10 sectioned in correspondence with one of the boxes. More particularly, it can be seen that the wing is composed of two cloth layers, an upper layer 10' and a lower layer 10", which define an air space that, when filled with air, keeps the wing rigid.

[0028] A rigid front rib 54, provided in each box, keeps the proper curvature of the leading wing profile. Said rib is useful especially when, during hang glider assembling, the air inside the wing is not yet pressurised.

[0029] The boxes are separated by cloth partitions 50, provided with circular openings 52 allowing the air to be distributed in uniform manner inside the wing, thereby permitting a symmetric inflation.

[0030] The trailing wing portion can be provided with a plurality of rear rigid ribs 56 that, by keeping the proper curvature, act as stabilisers and assist in reducing the so-called "spin" effect during flight.

[0031] Air inlet into the wing takes place through valve 44, located in the lower wing surface 10" and shown in detail in Fig. 6. Valve 44 essentially consists of an opening 64, made in lower wing layer 10", and a cloth piece 60, of rectangular shape, applied to the inner surface so as to wholly cover opening 64.

[0032] Cloth piece 60 is sewed, along a side 62, to the wing cloth in such a manner that it can be lifted, as shown in solid line in Fig. 6, to allow air inlet, and can instead close opening 64 when the internal air pressure exceeds the external pressure.

[0033] During flight, the air inside wing 10 is pressurised, thereby closing valve 44 and creating a rigid wing profile.

[0034] Wing stiffness is therefore ensured by its own structure, of the self-inflatable and self-bearing type, and not by the tubular bearing structure, which therefore can be undersized with respect to conventional hang gliders. This has considerable advantages from the weight, size and assembling and disassembling easiness standpoints.

[0035] Moreover, the different positions the wing can take during flight allow varying the lift and the speed, and consequently the gliding coefficient, thereby permitting manoeuvres that would be otherwise impossible when using a conventional hang glider.

[0036] Even from the safety standpoint the hang glider made in accordance with the present invention has a lot of advantages. For instance, in the presence of ascending thermal currents, the wing stiffness together with the possibility of reducing lift and increasing the descent speed allows coming out from a dangerous situation. Moreover, in case of a structural frame failure, the wing in uppermost position acts as a parachute and allows the pilot to land in a wholly safe condition.

[0037] The structure robustness allows the hang glider to be equipped with an engine carriage, so that an engine-operated ultra-light aircraft with very reduced size is obtained.

Claims

1. A hang glider (1) of the type comprising:

- a bearing tubular structure including a longitudinal crossbar (4), a lower control trapeze (2), an upper vertical turret (6) and two wing spars (8),
- a wing (10) made of two half-wings (10a, 10b) joined together in the central portion and secured at their ends to the ends of the two wing spars (8)

- characterised in that** said wing (10) is a wing of variable dihedron type, connected to said lower control trapeze (8) through a plurality of cords (22a - 28a, 22b - 28b) of which the lengths can be varied to vary the angle formed by each half-wing (10a, 10b) with the normal to the symmetry plane of the whole wing.
2. A hang glider according to claim 1, wherein said cords (22a - 28a, 22b - 28b) are arranged along the whole length of the wing (10) and are shortened or lengthened by extents which are directly proportional to the distance of the respective attack point on the wing from the end of each half wing.
3. A hang glider according to claim 2, wherein the wing (10) is provided, in its central portion, with an eyelet (17) sliding on said upper vertical turret (6).
4. A hang glider according to claim 3, wherein the maximum lengths of the cords (22a - 28a, 22b - 28b) are such as to allow the wing (10) to keep an uppermost position in which its central portion reaches the upper end of said upper vertical turret (6).
5. A hang glider according to claim 2, further comprising, in correspondence with the lower control trapeze (2), a rope pulley system (12, 14), controlled by the pilot and connected to said cords (22a - 28a, 22b - 28b), so that the latter can be pulled to lower the wing (10).
6. A hang glider according to claim 5, wherein the rope (30) of said pulley system (12) is connected to each cord (22a - 28a) through a ring (23a - 29a) which is secured to the respective cord and in which the rope (30) itself is freely slidable.
7. A hang glider according to claim 1, wherein said wing (10) is a box-type wing.
8. A hang glider according to claim 7, wherein said boxes are in communication with one another through openings (52) provided in the partition walls (50) between adjacent boxes.
9. A hang glider according to claim 7, wherein said wing (10) comprises, on its lower surface (10"), a plurality of openings (64) for air inlet into said boxes.
10. A hang glider according to claim 9, wherein each opening (64) is closed by a valve (44) which opens towards the inside to allow air inlet and which closes when the pressure inside the box exceeds the external pressure.
11. A hang glider according to any of claims 7 to 10, wherein said wing (10) is equipped with a plurality of rigid front ribs (54) capable of keeping the leading wing profile curved.
12. A hang glider according to any of claims 7 to 11, wherein said wing (10) is equipped with a plurality of rigid rear ribs (56) inserted into the trailing end portion of the wing.

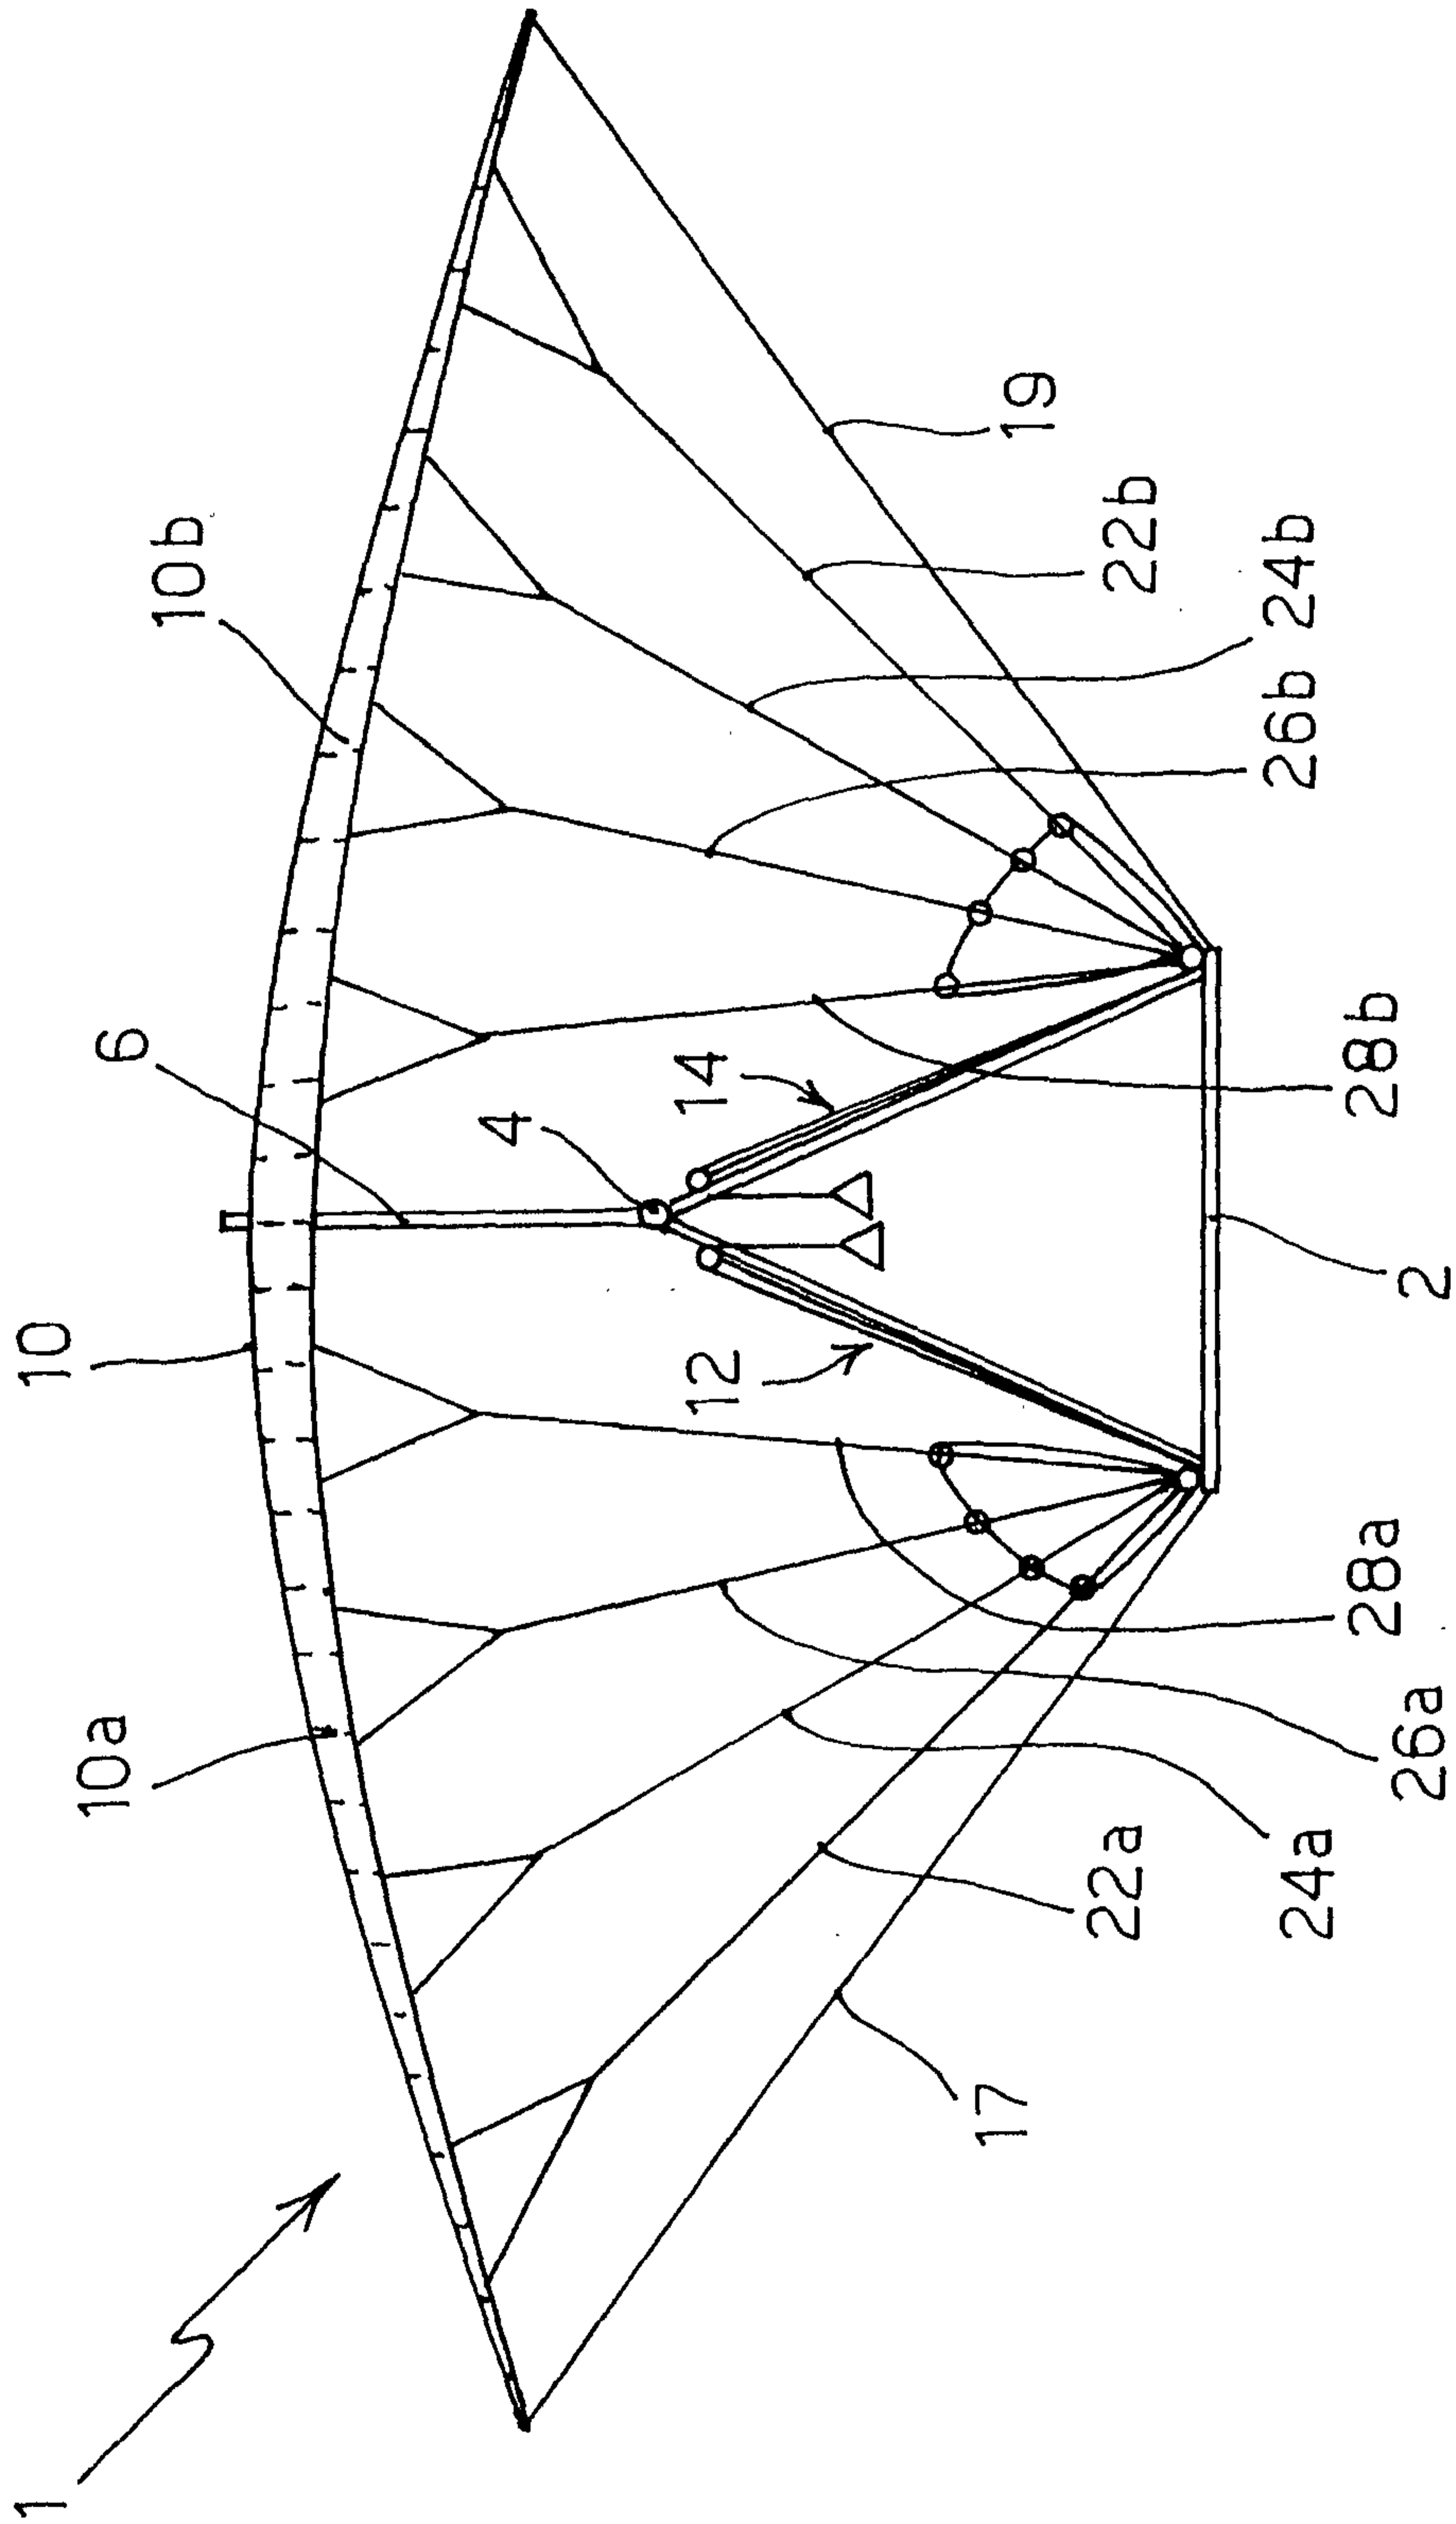


FIG. 1

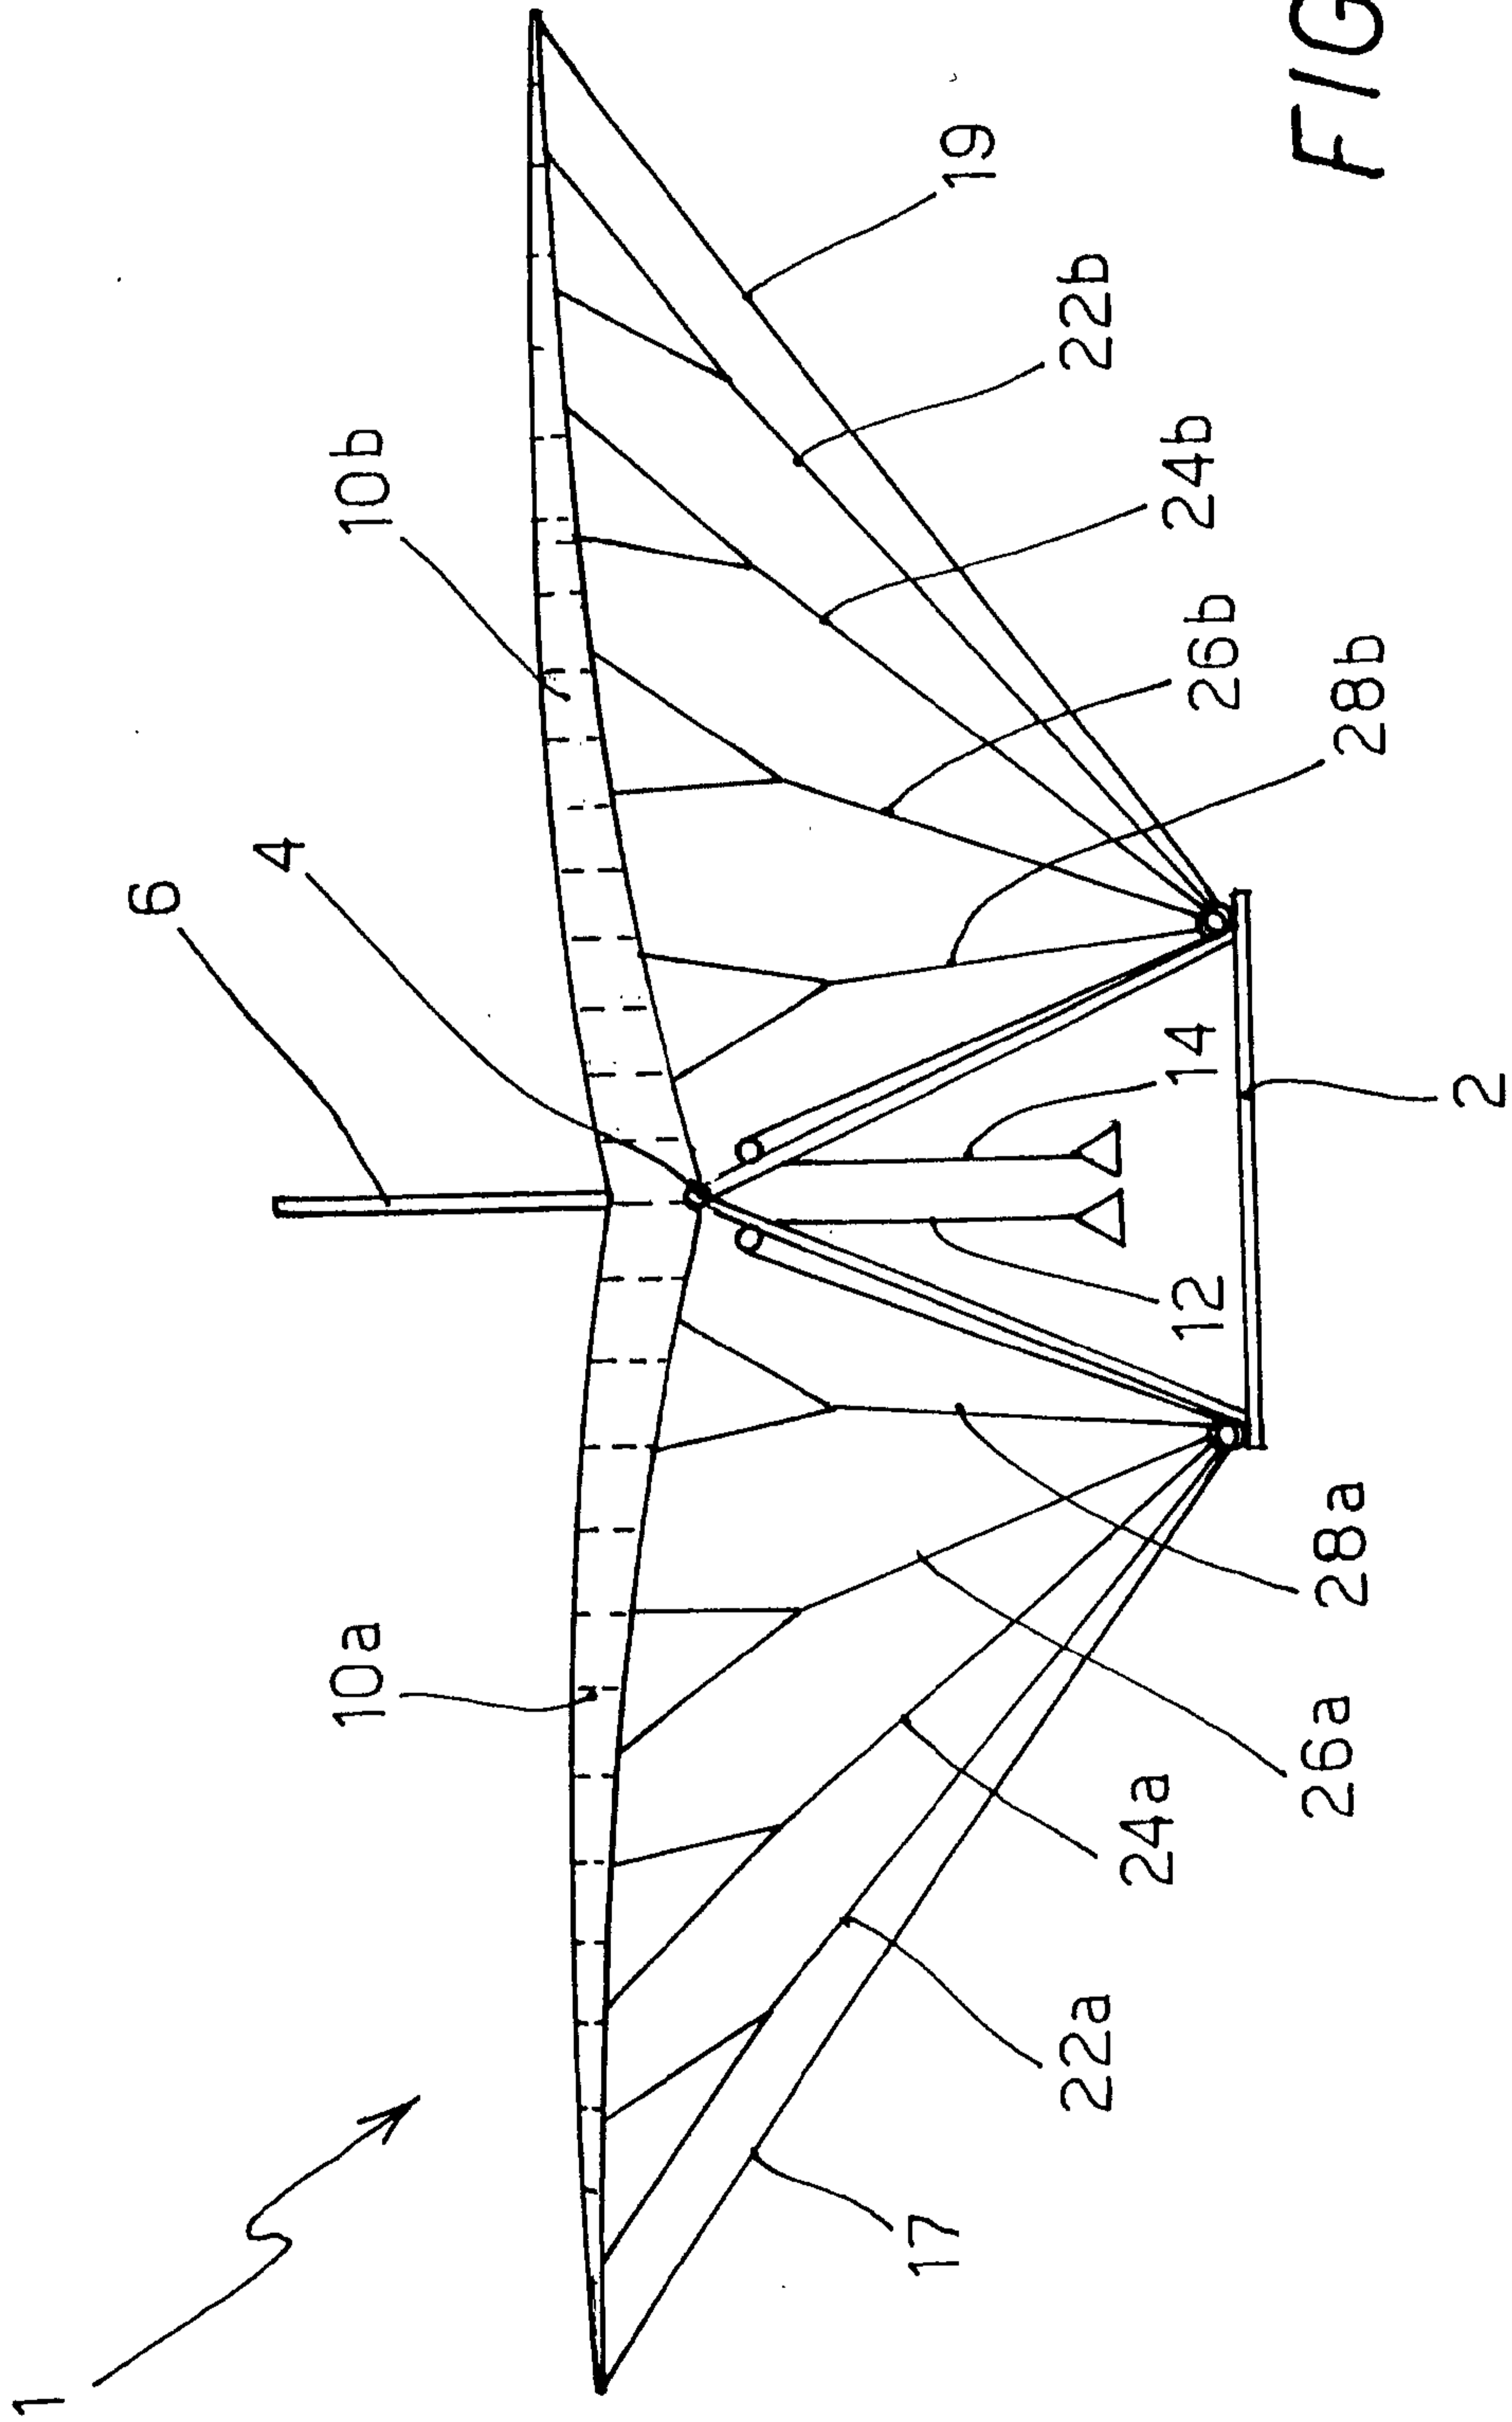


FIG. 2

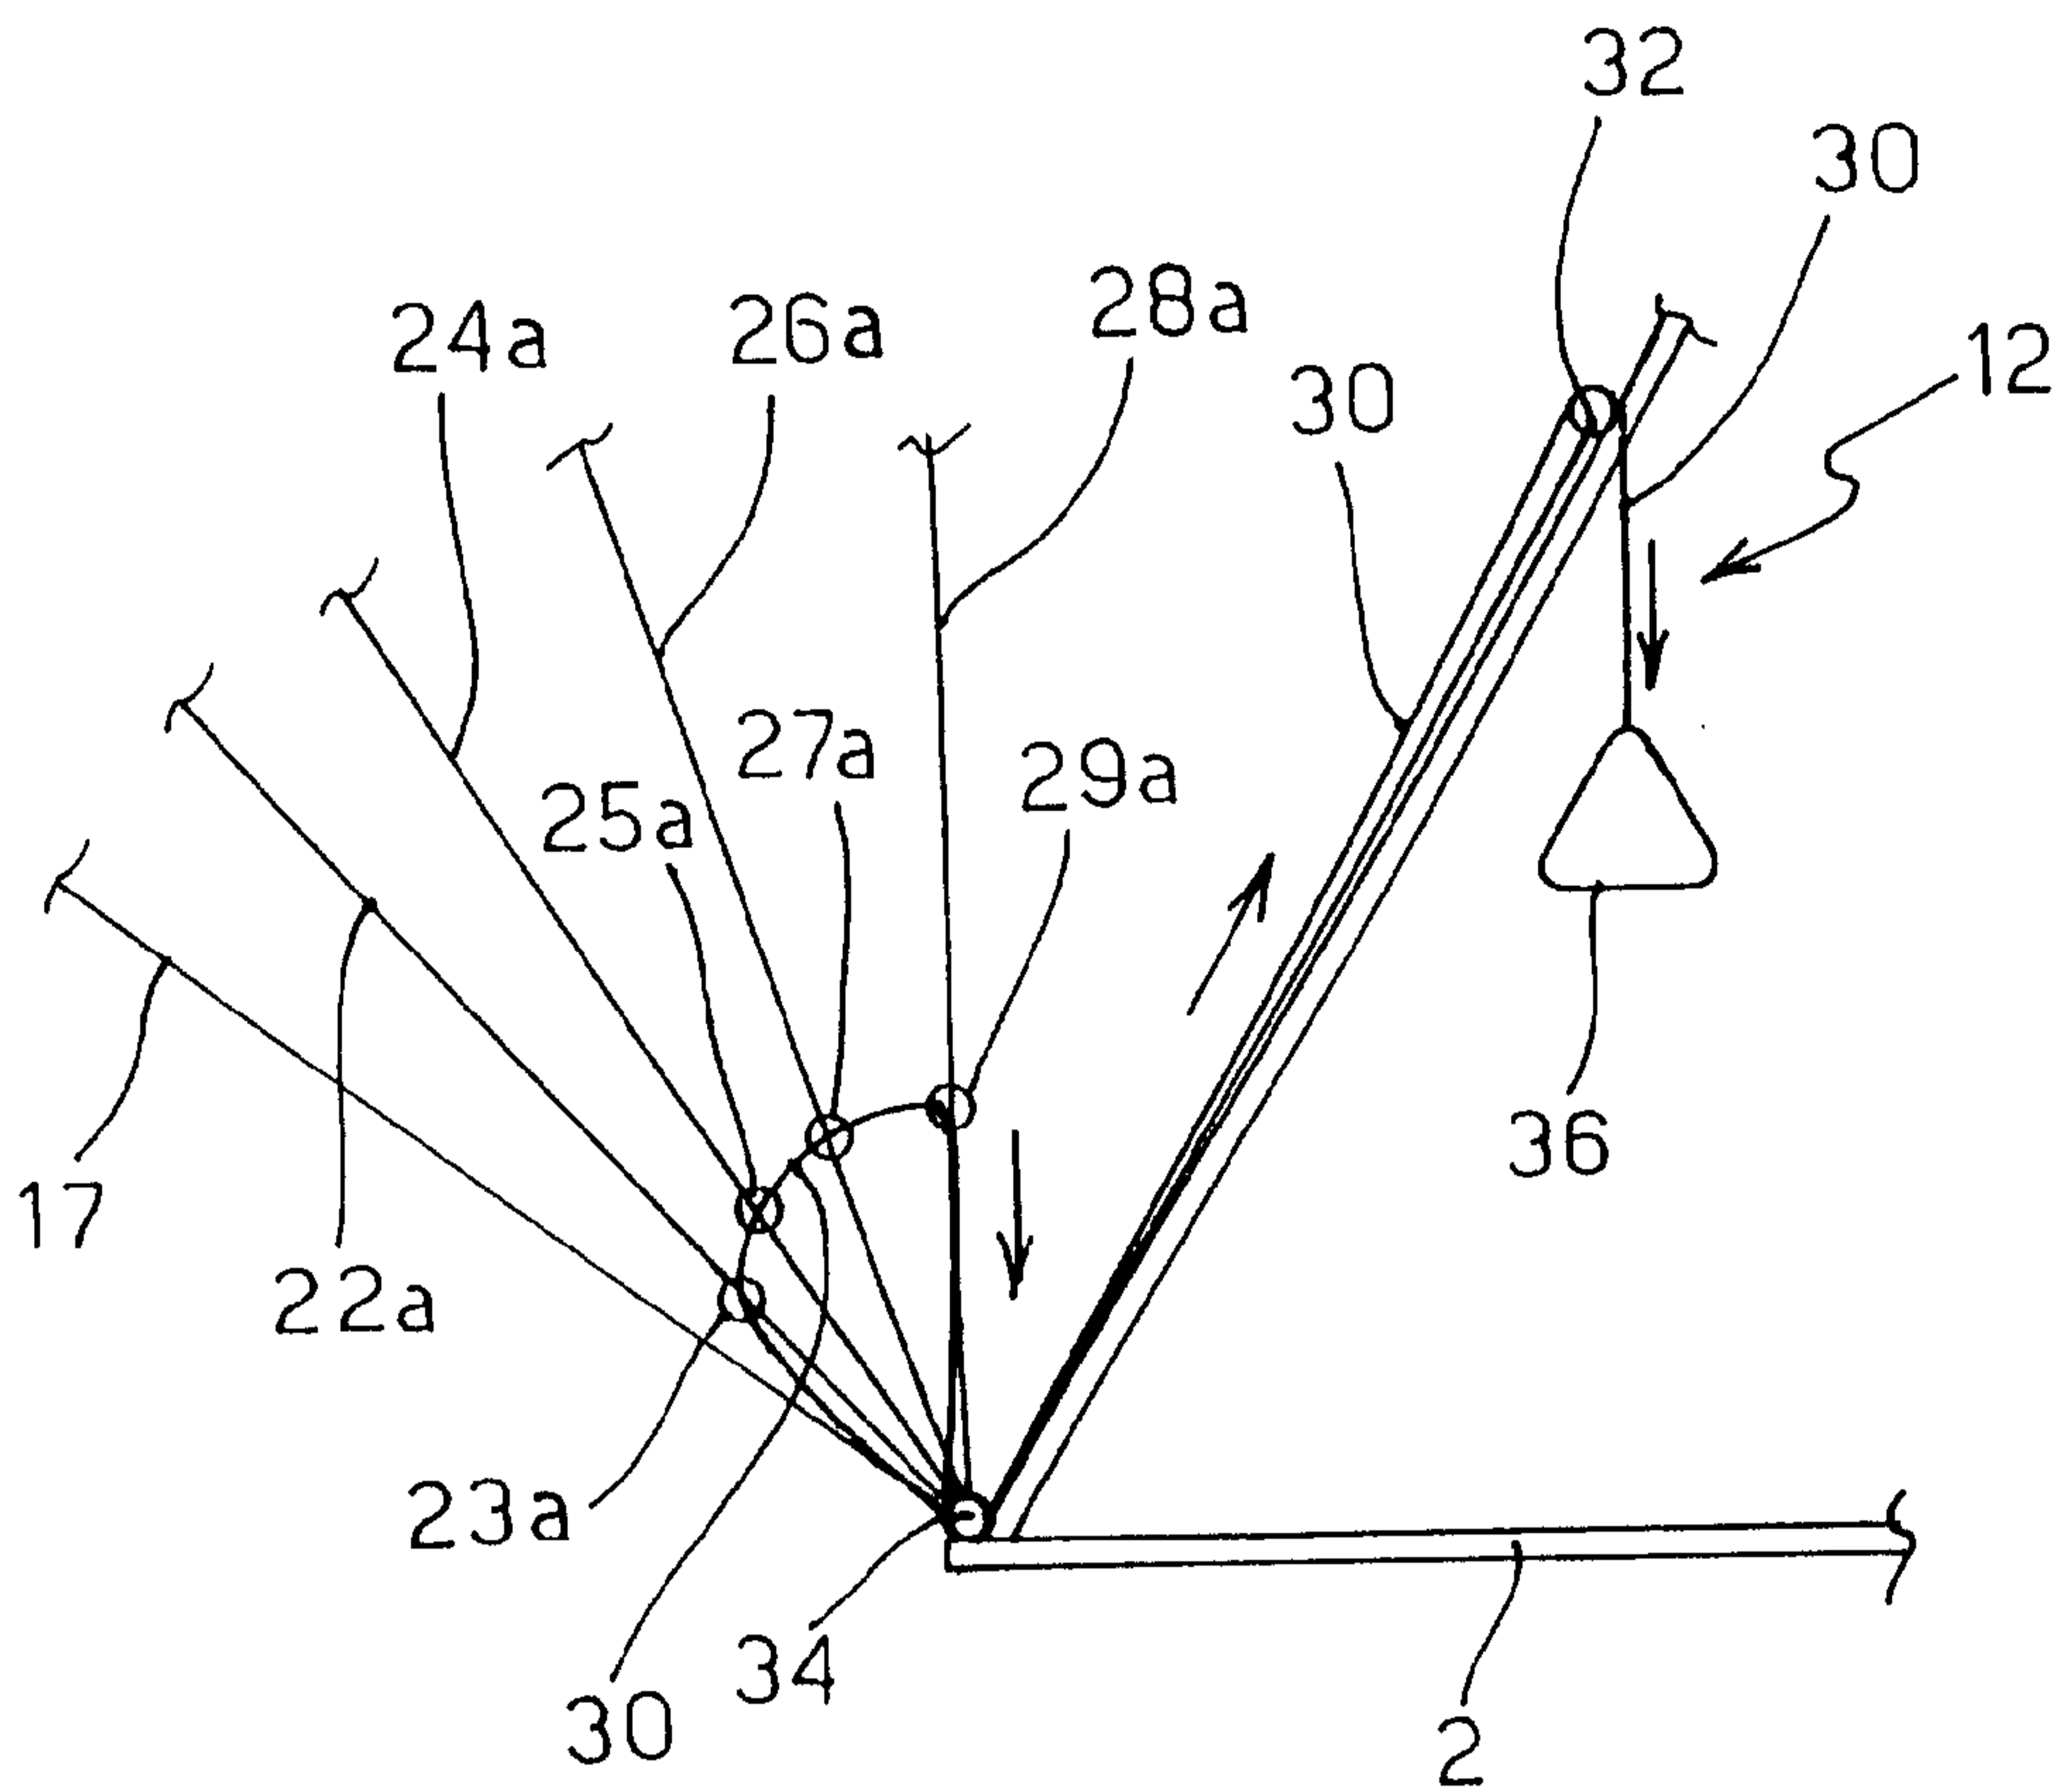


FIG. 3

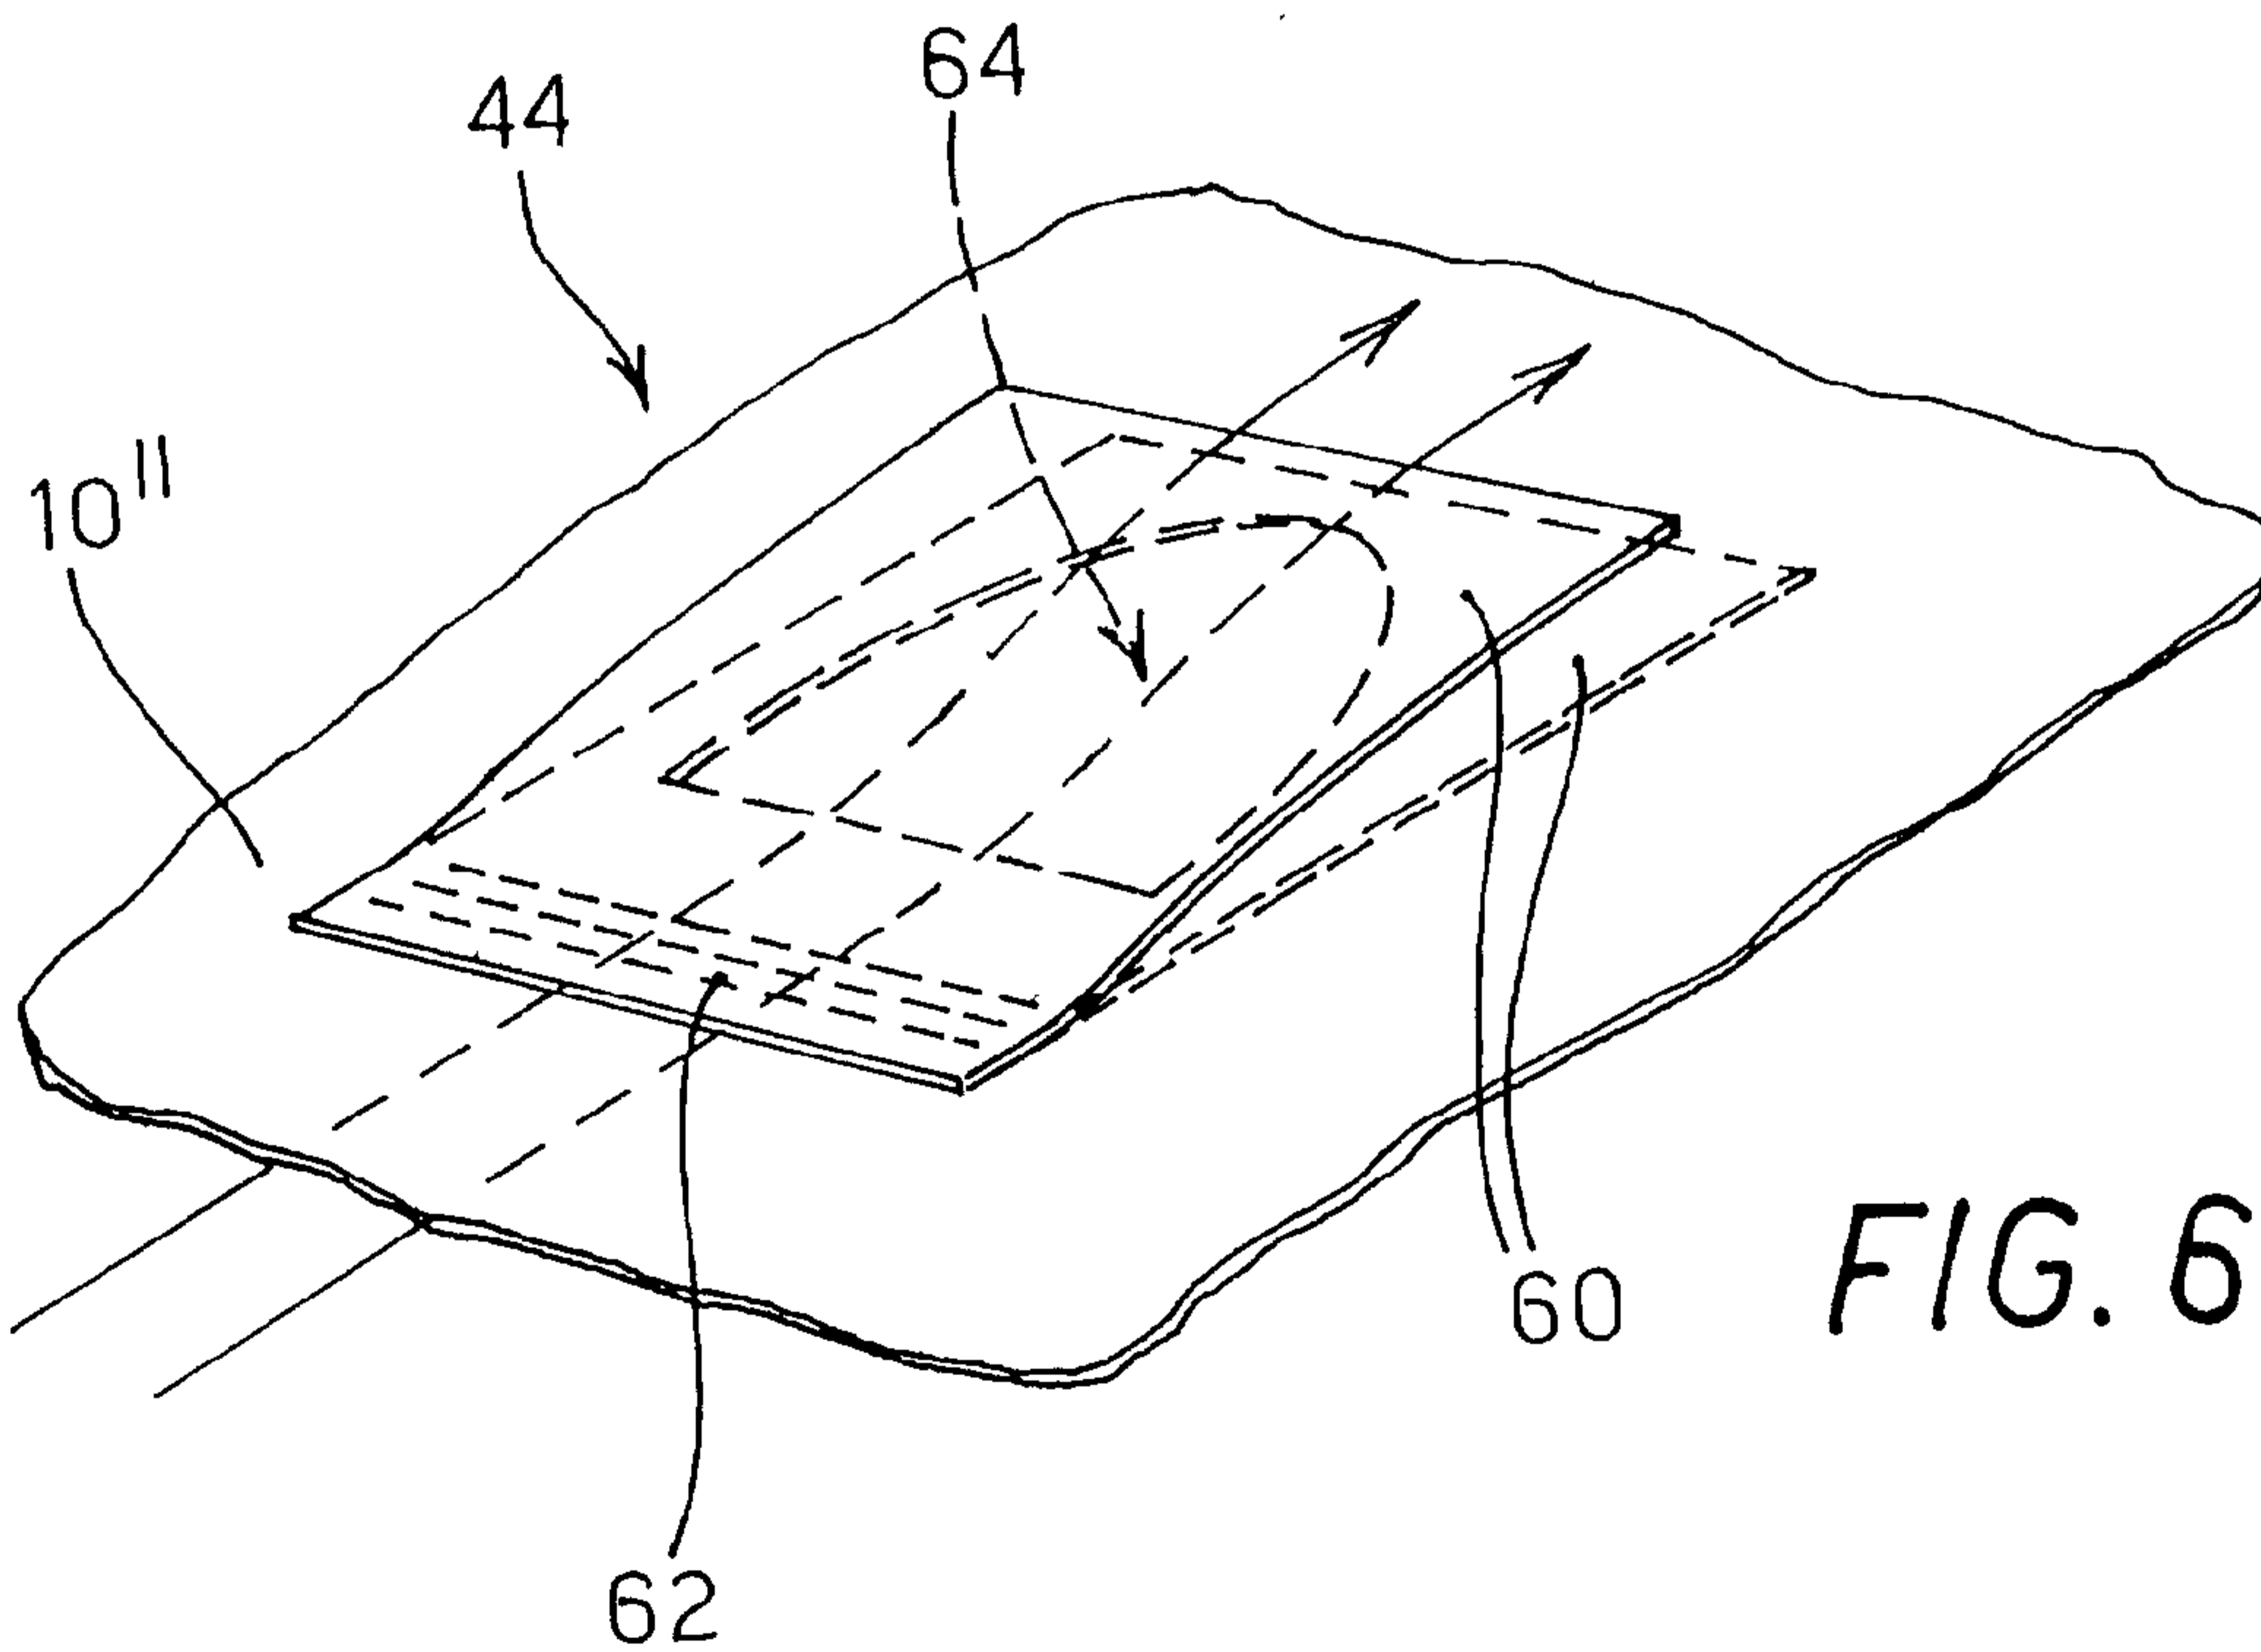


FIG. 6


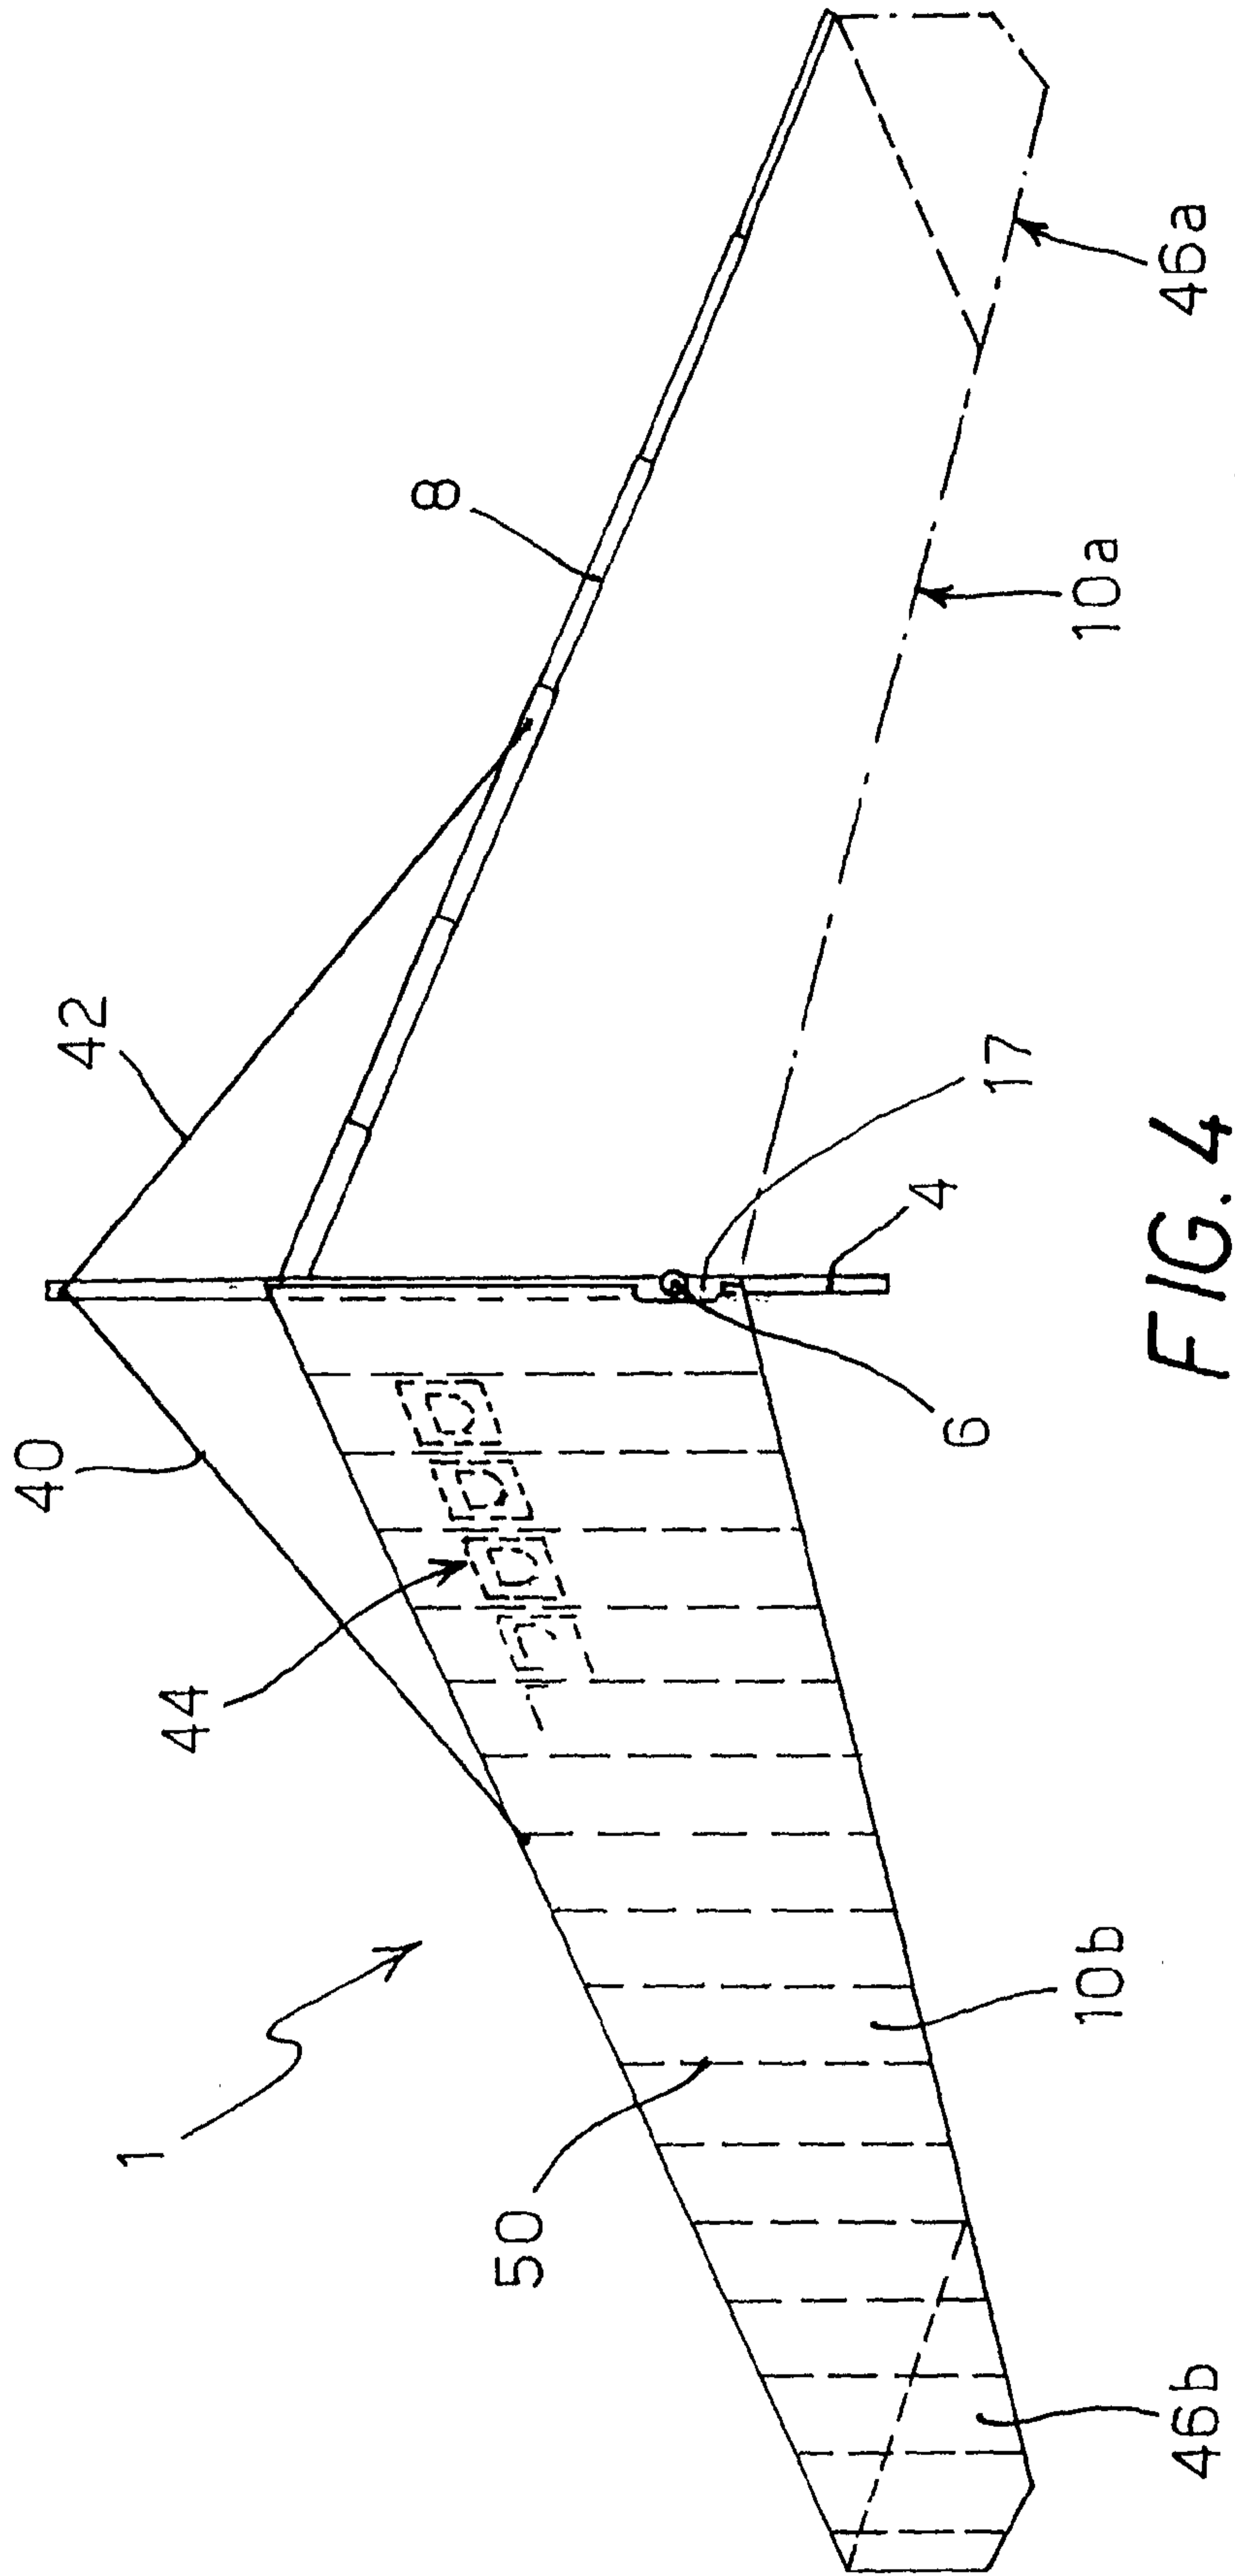


FIG. 4



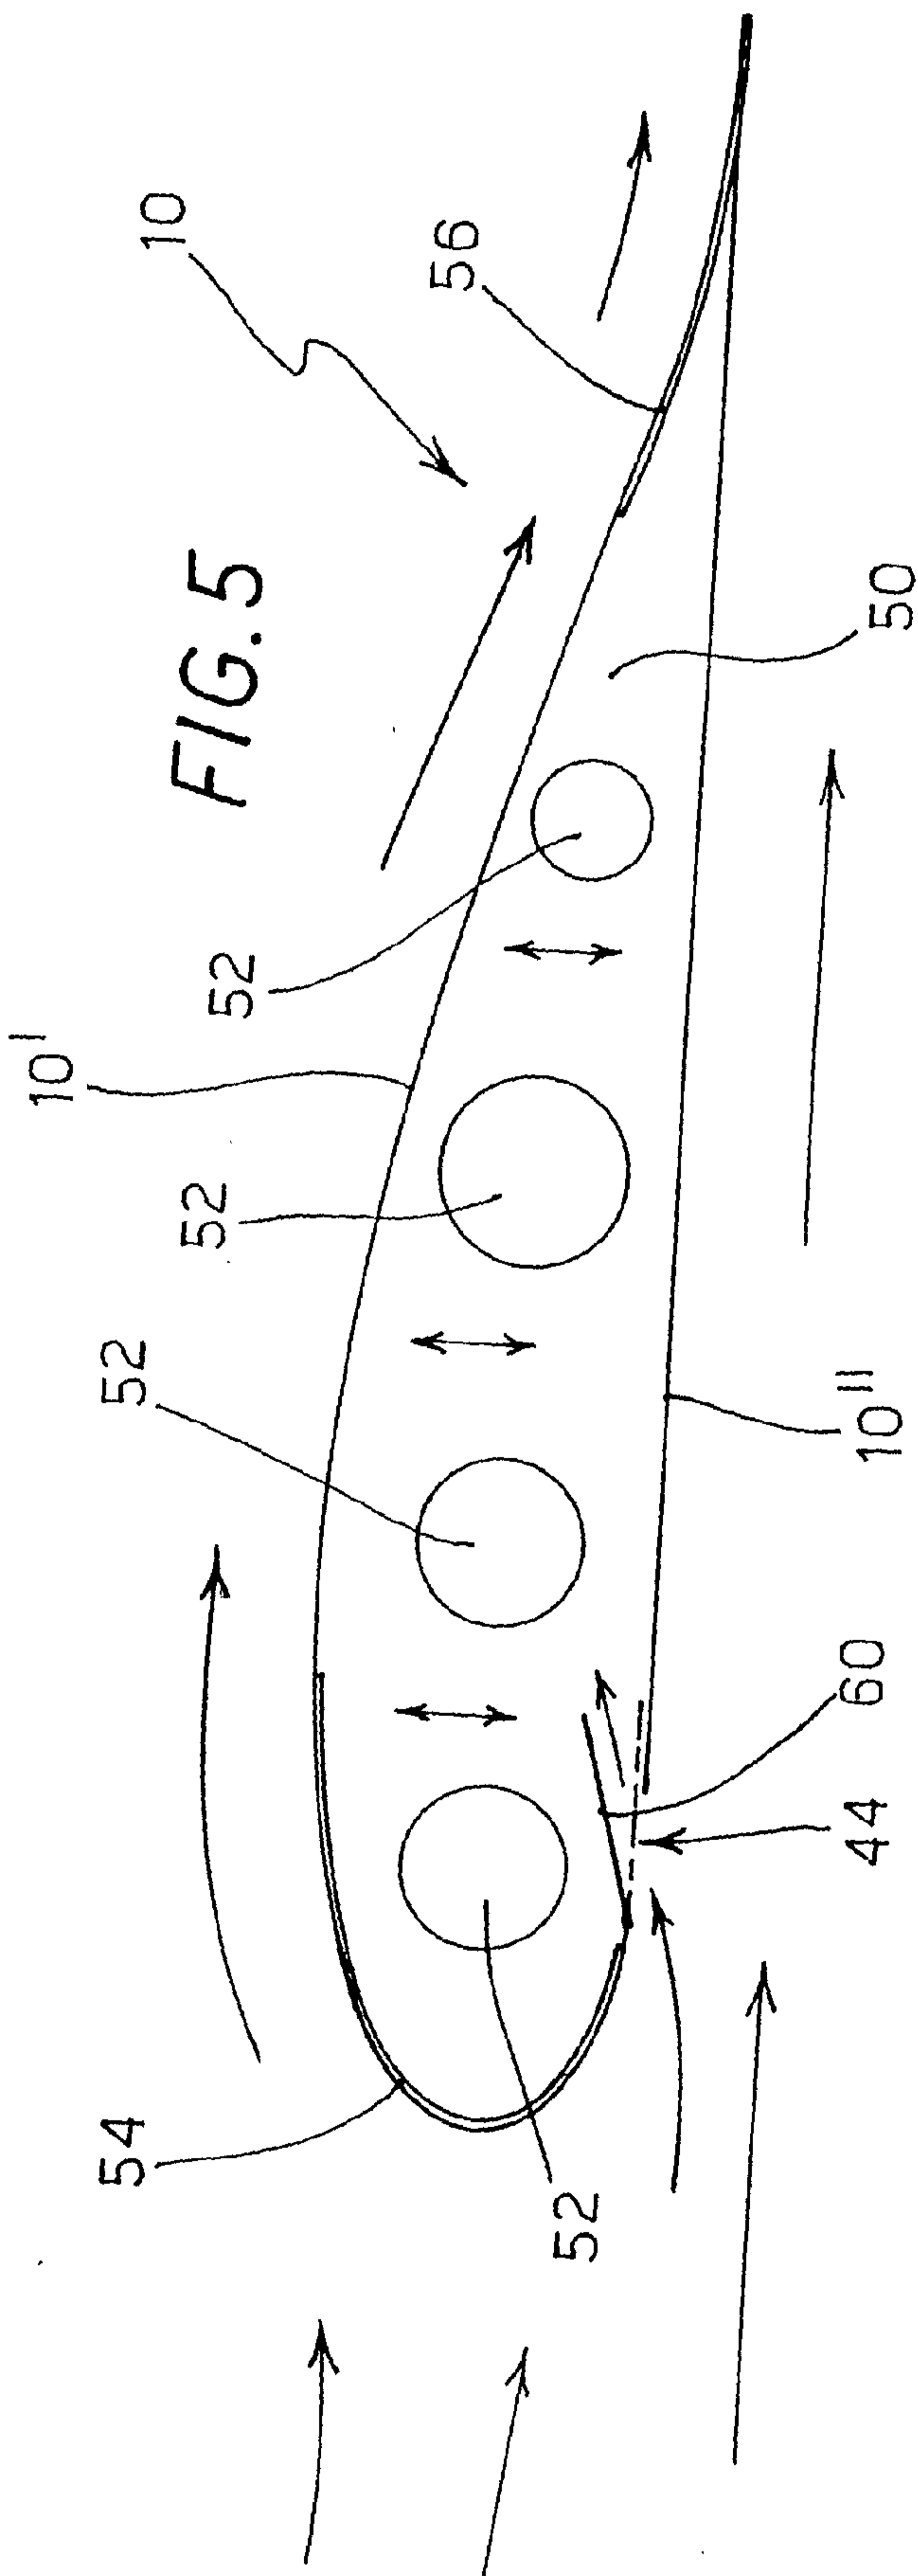

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 83 0325

DOCUMENTS CONSIDERED TO BE RELEVANT				
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)	
A	US 3 936 012 A (MURRAY STEPHEN C) 3 February 1976 (1976-02-03) * column 1, line 41-43 * * column 1, line 51-59 * * column 2, line 55-68 * * column 3, line 33-36 * * column 5, line 23-35 * * figures 3,4 *	1-6	B64C31/028	
A	US 4 050 654 A (HECKMAN RONALD A) 27 September 1977 (1977-09-27) * column 1, line 31-40 * * column 3, line 19-33 * * column 4, line 65 - column 5, line 29 * * figures 5-7 *	1-6		
A	FR 2 310 258 A (DECROIX PAUL) 3 December 1976 (1976-12-03) * page 2, line 3-33 * * figure *	7-10		
A	EP 0 109 906 A (DARLET JEAN LOUIS) 30 May 1984 (1984-05-30) * the whole document *	1,11,12		TECHNICAL FIELDS SEARCHED (Int.Cl.7)
A	GB 2 050 263 A (AIRWAVE GLIDERS LTD) 7 January 1981 (1981-01-07) * the whole document *	1,11,12		B64C
A	DE 34 21 503 A (EIB FRITZ) 12 December 1985 (1985-12-12) * the whole document *	1,11,12		
The present search report has been drawn up for all claims				
Place of search MUNICH		Date of completion of the search 12 October 2000	Examiner Pedersen, K	
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document		
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document				

EPC FORM 1503 03 82 (P04001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 83 0325

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-10-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3936012 A	03-02-1976	NONE	
US 4050654 A	27-09-1977	NONE	
FR 2310258 A	03-12-1976	NONE	
EP 0109906 A	30-05-1984	FR 2537090 A	08-06-1984
GB 2050263 A	07-01-1981	FR 2457217 A	19-12-1980
DE 3421503 A	12-12-1985	NONE	